


### PARAMETERS

Impedance	8 ohms
Re	7.1 ohms
Le	0.71 mH @ 1 kHz
Fs	83.4 Hz
Qms	3.21
Qes	0.60
Qts	0.51
Mms	6.8g
Cms	0.54 mm/N
Sd	73.9 cm <sup>2</sup>
Vd	14.8 cm <sup>3</sup>
BL	6.44 Tm
Vas	3.95 liters
Xmax	2.0 mm
VC Diameter	25 mm
SPL	88.2 dB @ 2.83V/1m
RMS Power Handling	50 watts
Usable Frequency Range (Hz)	90 - 15,000 Hz


### IMPEDANCE/PHASE

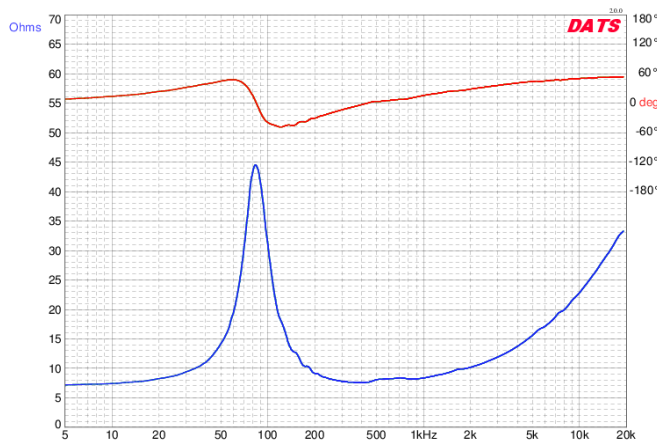

### FEATURES

- Great low-cost driver designed for use in small stage monitors
- Broad frequency coverage and flat midrange ensure that vocals and instruments sound perfect
- Rugged construction

### FREQUENCY RESPONSE

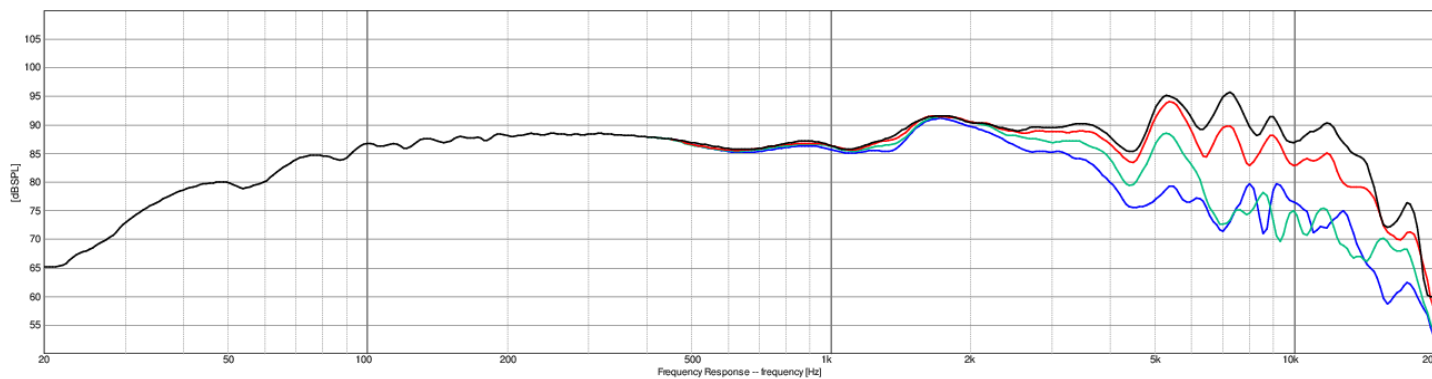

Note: 1/24<sup>th</sup> octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°  
Red = 15°  
Green = 30°  
Blue = 45°